

AiA Industries.com
 290 East 56th Avenue
 Denver, CO 80216
 (303) 296-9696

Salesperson: *Larry Barr*
 Please Fill Out and Fax to: (303) 296-2146
 or E-Mail to: Larry@aiaindustries.com





STANDARD CIRCULAR SKYLIGHT WORKSHEET

Sold To: _____ Phone: _____ Fax: _____
 Address: _____ City: _____ State: _____ Zip: _____
 Contact: _____ Project/PO: _____ E-Mail: _____

QTY.	Model Number	(A) Inside Curb Diameter (See Below In Inches)	(B) Dome Rise (Usually 20-25% of smaller size if not specified)	Glazing Colors (Choose One)
	30	24"	8"	Standard Double Acrylic Dome <input type="checkbox"/> Clear over Clear <input type="checkbox"/> Bronze over Clear <input type="checkbox"/> Clear over White Optional Single Acrylic Dome <input type="checkbox"/> Clear <input type="checkbox"/> Bronze <input type="checkbox"/> White Other <input type="checkbox"/> _____
	36	31"	10"	
	48	43"	12"	
	60	54"	16"	
	72	67"	18"	
	84	79"	20"	
	96	91"	24"	

Standard Glazing: Acrylic Domes
Optional Glazing: Glass, and Multiwall Polycarbonate (High Impact Domes available on request.).

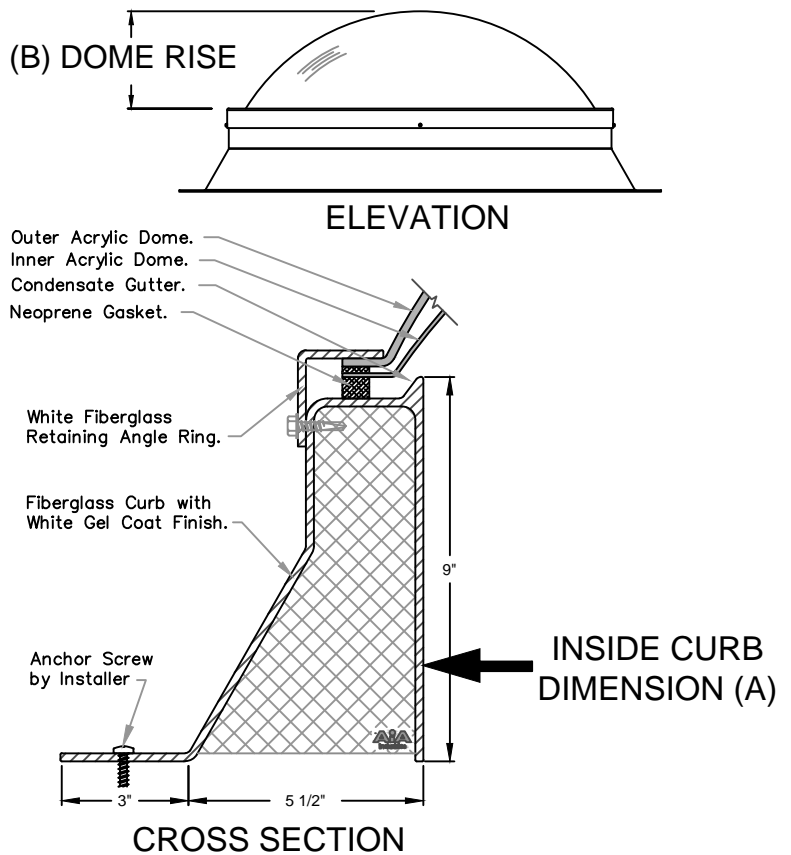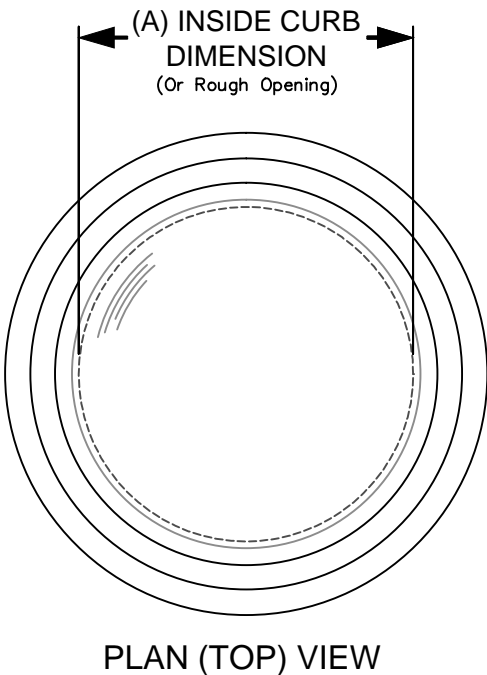

Approved By: _____ Date: _____

Specifications: Skylights as manufactured by AiA Industries, Inc. Denver, Colorado (303) 296-9696. Units consist of a 9" high frame/curb of insulated white gelcoat fiberglass molded with a 3" roof flange with an outer fiberglass retaining ring constructed to withstand 40 P.S.F. loading and 20 P.S.F. outward loading. Domes units shall consist of a one piece formed acrylic plastic and have rubber gaskets between domes and provisions shall be made for adequate weeping to exterior. Glass units shall be constructed of sealed insulating glass units with tempered outer lite, and laminated inner lite. Units shall be constructed to minimize air infiltration.

Note: Condensation is not a Skylight defect, it's a result of atmospheric conditions inside and outside of the building. Skylights are designed to structurally account for expansion and contraction. Occasionally there may be audible popping noises especially with acrylic domes. All Skylight Glazing (transparent material) will have inherent minor distortion especially when viewed at an angle. Tolerances are +/- 1/8".

AiA Skylights are not designed to support people. OSHA approved Safety devices are to be used around skylights for personal safety.
 This Worksheet will supersede all details on quotation - Please double check for accuracy.