



290 East 56th Avenue
 Denver, CO 80216
 303-296-9696
 aiaindustries.com

Salesperson: _____

Please Fill Out and Fax to: 303-296-2146
 or E-Mail to: INDSales@ aiaindustries.com

REPLACEMENT CIRCULAR DOME WORKSHEET

Sold To: _____ Phone: _____ Fax: _____
 Address: _____ City: _____ State: _____ Zip: _____
 Contact: _____ Project/PO: _____ E-Mail: _____

QTY.	(A) Outside Flange Dimension Flat to Flat	(B) Dome Height 20-25% of smaller dimension if not specified	(C) Flange Dimension All Around (Standard is 1 1/2")	Other Notes

Dome Type:

Standard Acrylic Free Blown Dome

Type: S
(Gradual Rise)

Glazing: (Choose One)

Standard Double Acrylic Dome

Clear over Clear
 Bronze over Clear
 Clear over White

Options:

Optional Single Acrylic Dome

Clear Bronze Opal

Optional Dome Upgrade:

CLEAR Heat & High Impact
 Clear outer with slight green tint

OSHA Fall-Guard Protection:

YES: Include Optional Custom OSHA Fall-Guard Protection.

TYPICAL

FALL-GUARD (SHIPPED LOOSE), GALVANIZED FINISH


FRAME NOT INCLUDED

NO: OSHA Fall-Guards NOT Needed Because There Are Other Types of OSHA Fall Protection By Others.

Initial _____

Installation Supplies:

Installation Kit
 -3/4" Wide x 1/4" High x 25' Long Curb Gasket, and
 -(16) #10x2" PPH SMS Installation Screws

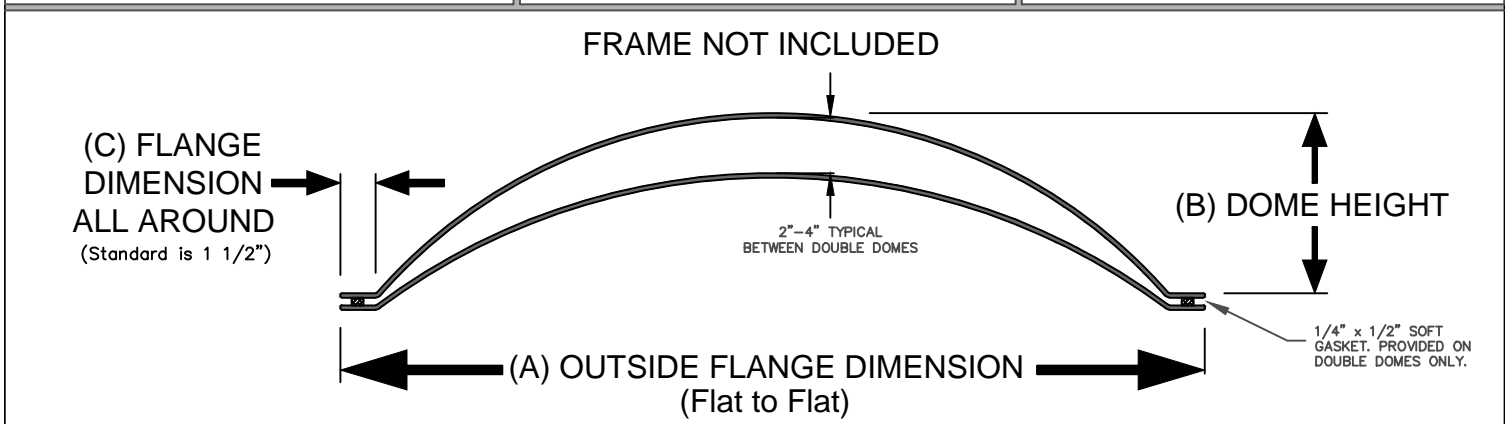

Approved By: _____ Date: _____

Specifications: Replacement Skylight Domes (Lenses without a metal frame) as manufactured by AiA Industries, Inc. Denver, Colorado. Consists of an acrylic thermoformed free blown dome(s) in industry standard thickness as determined by overall size. These Replacement Domes are designed to fit most standard skylight frames. Replacement Domes are unassembled and come with a peel-off protective film. Tolerances are +/- 1/8". Note- all Replacement Domes will have inherent minor distortions especially when viewed at an angle.

AiA Replacement Domes are not designed to support people. OSHA approved Safety devices are to be used around skylights for personal safety. This Worksheet will supersede all details on quotation - Please double check for accuracy.